

RDS 9



**3-STAGE
PLANETARY GEAR**

ITALY TECHNOLOGY

SAFETY | EFFICIENCY | QUALITY | RELIABILITY

RDS 9 is manufactured using high quality stainless steel with State of the Art Technology.

It is Powerful, Reliable, Safety and Flood-resistant.

Now, you can be satisfied with its excellent performance and enjoy the convenience by RDS 9.

RDS
RAGGIO DEL SOLE®


- ALUMINIUM ALLOY AA
- HARD STAINLESS STEEL

TECHNICAL SPECIFICATIONS

Driving Method	Screw Driven Piston Type
Operating Voltage	DC24v for Normal Speed DC12v for Cushioning Speed
Max. Output Power	80W per Driver
Max. Piston Stroke	31cm
Max. Piston Speed	2.2cm/sec.
Operation Cycle	14 second per 90°C (approx)
Position Limit Device	Electronic Fuzzy Logic
Gearbox	Rotary Planetary Reducer
Safety Clutch	Electronic Current Sensing
Backup Battery	12V 7AH
Main Supply	AC230V, 50Hz
Electronic Controller	Microcomputer Based
Remote Controller	UHF Digital PWM Type
Temperature	0°C to +80°C



Remote Controller

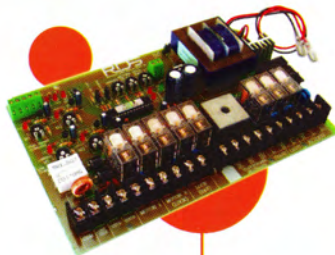


Control Panel 3-Speed




Battery 12V 7AH


RDS 9
L

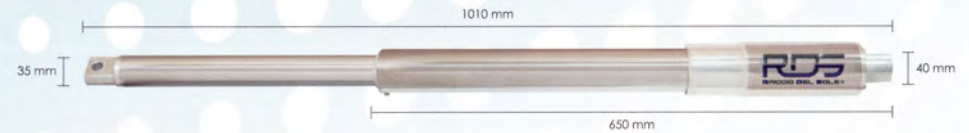


RDS 9
M

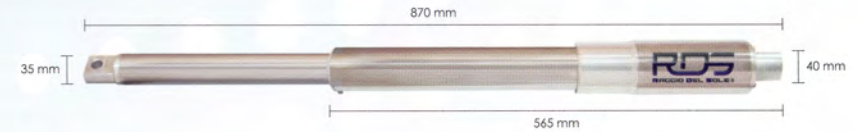


RDS 9
S

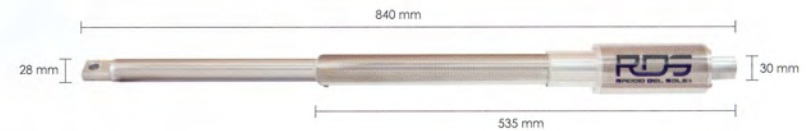


SWING GATE

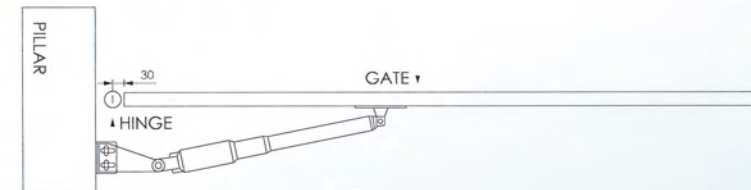

FOLDING GATE

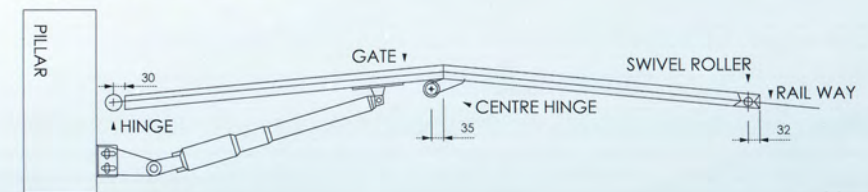

Authorised Dealer :

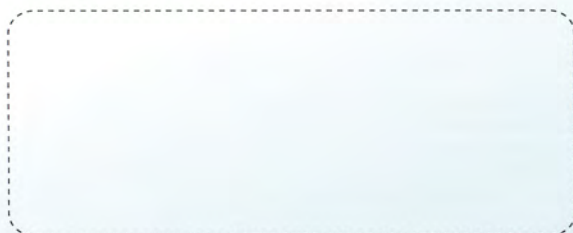

3-STAGE
PLANETARY GEAR
ITALY TECHNOLOGY

RDS 9